

RIVER - 4803 ORGANIC PENDANT

PROJECT PROJCT

SPEC TYPE

NOTES



FINISH FINI

BLKE

WHE

AYE

BRE

CBE

CPE

DBE

GGE

CHM

SIM

HGE

LNE

NBE

SBE

SGE

STE

RC1

RC2

FAMILY FAMILLE


WALL 3803-FRE

WALL 3803-LAG

CEILING 3803-FRE



CEILING 3803-LAG

DRIVER OPTION OPTION DE PILOTE

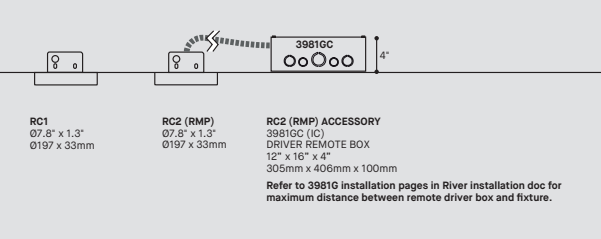

ORDERING SPECIFICATION		SPÉCIFICATION DE COMMANDE	CODE
MODEL	MODÈLE		
4803-FRE	RIVER FREEFORM PENDANT 60"		
4803-LAG	RIVER LAGOON PENDANT 60"		
LIGHT SOURCE	SOURCE LUMINEUSE		LED
LED	REGULAR OUTPUT		
COLOR TEMPERATURE	TEMPÉRATURE DE COULEUR		
22	2200K		
27	2700K		
30	3000K		
35	3500K		
COLOR RENDERING INDEX (CRI)	INDICE DE RENDU DE COULEUR (IRC)		90
90	90+ CRI		
VOLTAGE	VOLTAGE		
120V	120 VOLT		
277V	277 VOLT		
CONTROL OPTION	OPTION DE CONTRÔLE		
DV	0-10V DIMMING (120V-277V)		
NLTAIR2*	NLIGHT AIR CONTROL GEN 2		
NLIGHT*	NLIGHT WIRED CONTROL		
	* NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLAA FOR NLTAIR2 OR 39NLWA FOR NLIGHT) REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.		
	* FOR EMERGENCY BATTERY WITH NLIGHT OPTIONS, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.		
EMERGENCY BATTERY	BATTERIE D'URGENCE		
	EM DRIVER BOX INCLUDED. INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS		
EMB*	EMERGENCY BATTERY FOR REMOTE BOX		
	* 3981EA ACCESSORY IS REQUIRED FOR THIS OPTION		
CABLE	CÂBLE		POA
POA	POWER OVER AIRCRAFT SUSPENSION (NO POWER CABLE)		
CABLE LENGTH	LONGUEUR DE CÂBLE		
60	60" CABLE (STD LENGTH)		
**	CUSTOM CABLE LENGTH (PLEASE SPECIFY)		
	FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.		
MOUNTING	MONTAGE		
	CENTERED ROUND CANOPY / PAVILLON ROND CENTRE		
REC1*	SCREWLESS Ø7.75" X 1.35" CANOPY		
REC2	REMOTE DRIVER OPTION SCREWLESS Ø7.75" X 1.35" CANOPY		
	* NOT AVAILABLE FOR 4803-FRE		
MOUNTING OPTIONS	OPTIONS DE MONTAGE		RCA
RCA	CENTERED ROUND CANOPY - AIRCRAFT CABLES ANGLED TO CENTER		
CANOPY AND ANCHORS FINISH	FINI PAVILLON ET ANCRAGE(S)		
BLKE	BLACK FINE TEXTURE		
WHE	WHITE FINE TEXTURE		
MATCH*	COLOR MATCH WITH BRACKET		
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
BRACKET FINISH	FINI BRACKET		
BLKE	BLACK	GGE*	GRASS GREEN
WHE	WHITE	HGE*	HUNTER GREEN
CHM*	CHAMPAGNE METALLIC	LNE*	LUNAR GREY
SIM*	SILVER METALLIC	NBE*	NAVY BLUE
AYE*	APRICOT YELLOW	SBE*	SAND BEIGE
BRE*	BRICK RED	SGE*	SAGE GREY
CBE*	CHOCOLATE BROWN	STE*	SUMMER TEAL
CPE*	CLAY PINK	RAL**	PLEASE SPECIFY RAL CODE
DBE*	DYNAMIC BLUE		
	ALL FINISHES ARE FINE TEXTURED WITH THE EXCEPTION OF CHM, SIM.		
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.		
	** SPECIFY 4 DIGIT RAL CLASSIC CODE. LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.		
ACCESSORY	ACCESSOIRE		
	ALL ACCESSORIES ARE AVAILABLE FOR ADVANCE SHIPPING		
39NLAA*	NLIGHT AIR GEN 2 REMOTE POWER PACK		
39NLWA*	NLIGHT WIRED REMOTE POWER PACK		
3981GC	DRIVER BOX FOR REMOTE INSTALLATION - 4" X 12" X 16"		
ACCESSORY EMERGENCY BATTERY	ACCESSOIRE BATTERIE D'URGENCE		
3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY		

RIVER 4803/3803

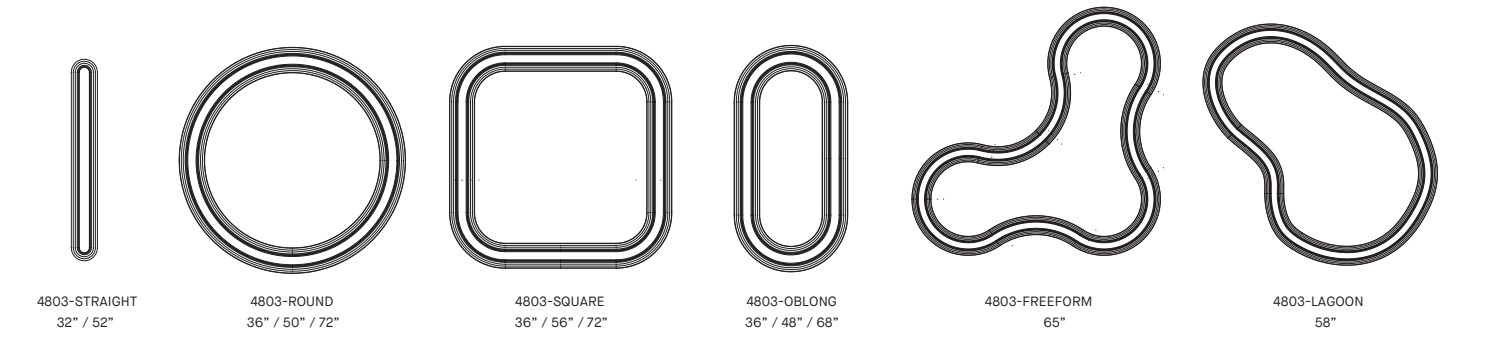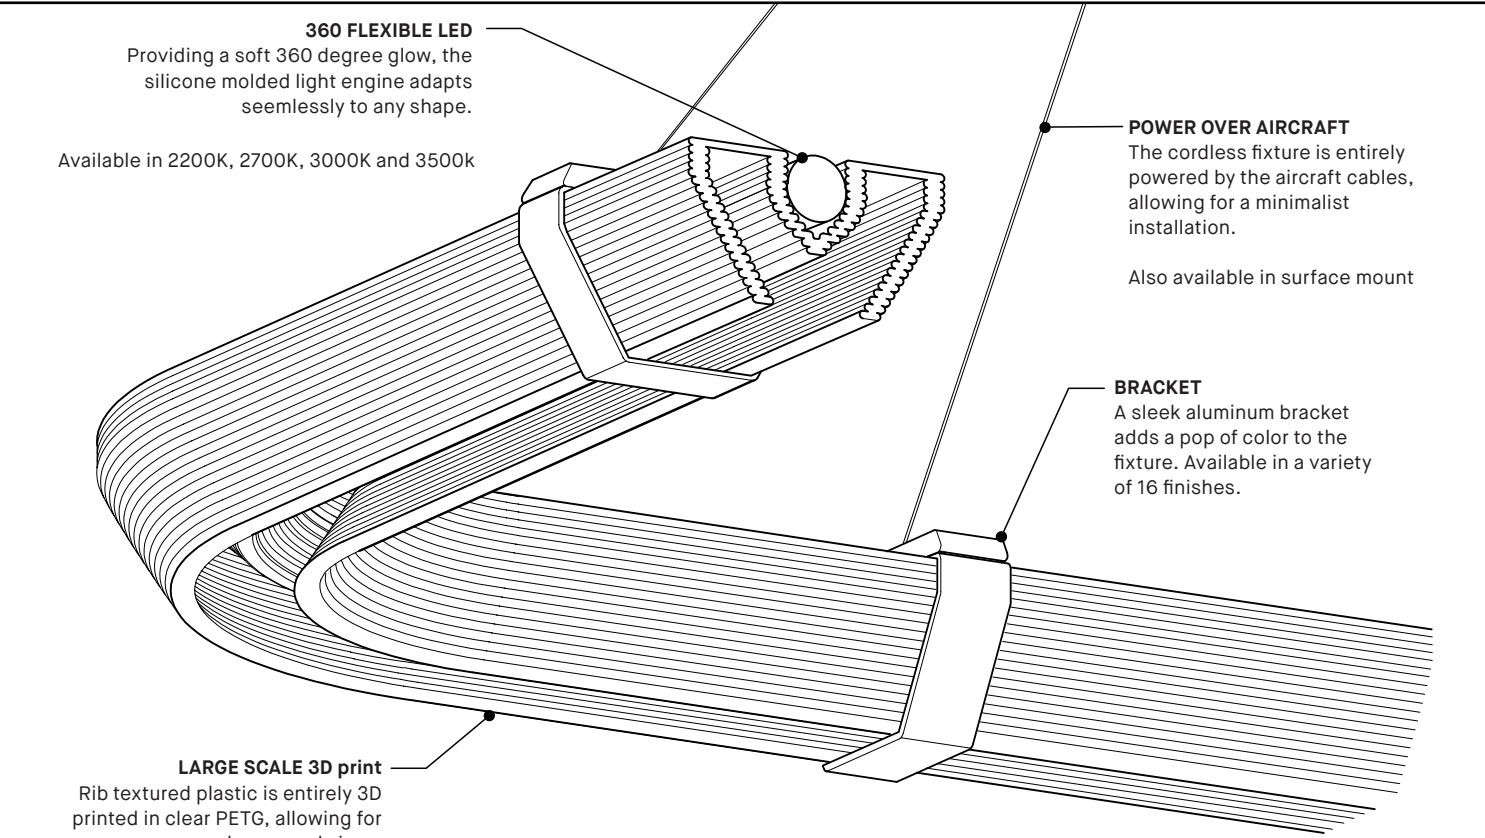

PRODUCT SPECIFICATION	4803-STRAIGHT 32" / 52"	4803-ROUND 36" / 50" / 72"	4803-SQUARE 36" / 56" / 72"	4803-OBLONG 36" / 50" / 72"	4803-SQUARE 38" / 56" / 72"	4803-FREEFORM 65"	4803-LAGOON 58"
PERFORMANCE	REG	REG	REG	REG	REG	REG	REG
SYSTEM WATTAGE	16.3W / 28.1W	59.8W / 84.2W / 126.3W	42.2W / 59.6W / 84.2W	42.2W / 59.6W / 84.2W	73.7W / 112.2W / 168.7W	112.2W	73.7W
DELIVERED LUMENS (4000K)	715 LM / 1546 LM	3060 LM / 4325 LM / 6494 LM	2165 LM / 3062 LM / 4329 LM	2165 LM / 3062 LM / 4329 LM	3783 LM / 5760 LM / 8665 LM	7575 LM	5760 LM
EFFICACY	54.8 LM/W	54.8 LM/W	54.8 LM/W	54.8 LM/W	54.8 LM/W	54.8 LM/W	54.8 LM/W
OTHER INFORMATION							
LUMINAIRE'S WEIGHT	4.3LBS / 7.8LBS	15.5LBS / 21.9LBS / 32.9LBS	10.9LBS / 15.5LBS / 22.0LBS	10.9LBS / 15.5LBS / 22.0LBS	19.2LBS / 29.1LBS / 40.8LBS	29.2LBS	19.4LBS
	1.9KG / 3.5KG	7.0KG / 10.0KG / 15.0KG	5.0KG / 7.1KG / 10.0KG	5.0KG / 7.1KG / 10.0KG	8.7KG / 13.2KG / 18.5KG	13.3KG	8.8KG
L70 (LUMEN MAINTENANCE)	60,000	60,000	60,000	60,000	60,000	60,000	60,000

EFFICACY MULTIPLIERS		
CRI	CCT	FACTOR
90+	4000K	1.00
90+	3500K	0.98
90+	3000K	0.94
90+	2700K	0.91

LIGHT DISTRIBUTION

404X-BEL



Visit our website for warranty terms and conditions.