

RIVER - 4803 ROUND PENDANT

PROJECT PROJCT

SPEC TYPE

NOTES




FINISH FINI



FAMILY FAMILLE





MOUNTING OPTIONS OPTION DE MONTAGE

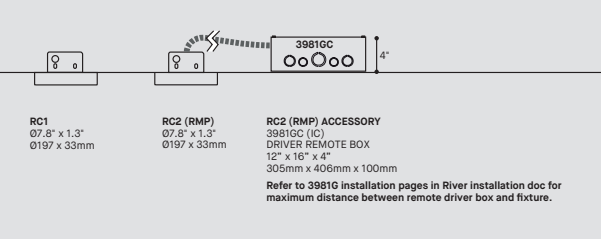

ORDERING SPECIFICATION		SPÉCIFICATION DE COMMANDE		CODE
MODEL	MODÈLE			
4803-R36	RIVER ROUND PENDANT 32"			
4803-R50	RIVER ROUND PENDANT 48"			
4803-R72	RIVER ROUND PENDANT 72"			
LIGHT SOURCE	SOURCE LUMINEUSE			LED
LED	REGULAR OUTPUT			
COLOR TEMPERATURE	TEMPÉRATURE DE COULEUR			
22	2200K			
27	2700K			
30	3000K			
35	3500K			
COLOR RENDERING INDEX (CRI)	INDICE DE RENDU DE COULEUR (IRC)			90
90	90+ CRI			
VOLTAGE	VOLTAGE			
120V	120 VOLT			
277V	277 VOLT			
CONTROL OPTION	OPTION DE CONTRÔLE			
DV	0-10V DIMMING (120V-277V)			
NLTAIR2*	NLIGHT AIR CONTROL GEN 2			
NLIGHT*	NLIGHT WIRED CONTROL			
	* NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLAA FOR NLTAIR2 OR 39NLWA FOR NLIGHT)			
	REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.			
	* FOR EMERGENCY BATTERY WITH NLIGHT OPTIONS, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.			
EMERGENCY BATTERY	BATTERIE D'URGENCE			
EM DRIVER BOX INCLUDED. INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS				
EMB*	EMERGENCY BATTERY FOR REMOTE BOX			
	* 3981EA ACCESSORY IS REQUIRED FOR THIS OPTION			
CABLE	CÂBLE			POA
POA	POWER OVER AIRCRAFT SUSPENSION (NO POWER CABLE)			
CABLE LENGTH	LONGUEUR DE CÂBLE			
60	60" CABLE (STD LENGHT)			
**	CUSTOM CABLE LENGTH (PLEASE SPECIFY)			
	FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.			
MOUNTING	MONTAGE			
CENTERED ROUND CANOPY / PAVILLON ROND CENTRE				
REC1*	SCREWLESS Ø7.75" X 1.35" CANOPY			
REC2	REMOTE DRIVER OPTION SCREWLESS Ø7.75" X 1.35" CANOPY			
	* NOT AVAILABLE FOR 4803-R72			
MOUNTING OPTIONS	OPTIONS DE MONTAGE			RCA
RCA	CENTERED ROUND CANOPY - AIRCRAFT CABLES ANGLED TO CENTER			
CANOPY AND ANCHORS FINISH	FINI PAVILLON ET ANCRAGE(S)			
BLKE	BLACK FINE TEXTURE			
WHE	WHITE FINE TEXTURE			
MATCH*	COLOR MATCH WITH BRACKET			
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE			
BRACKET FINISH	FINI BRACKET			
BLKE	BLACK	GGE*	GRASS GREEN	
WHE	WHITE	HGE*	HUNTER GREEN	
CHM*	CHAMPAGNE METALLIC	LNE*	LUNAR GREY	
SIM*	SILVER METALLIC	NBE*	NAVY BLUE	
AYE*	APRICOT YELLOW	SBE*	SAND BEIGE	
BRE*	BRICK RED	SGE*	SAGE GREY	
CBE*	CHOCOLATE BROWN	STE*	SUMMER TEAL	
CPE*	CLAY PINK	RAL**	PLEASE SPECIFY RAL CODE	
DBE*	DYNAMIC BLUE			
ALL FINISHES ARE FINE TEXTURED WITH THE EXCEPTION OF CHM, SIM.				
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.				
** SPECIFY 4 DIGIT RAL CLASSIC CODE. LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.				
ACCESSORY	ACCESSOIRE			
ALL ACCESSORIES ARE AVAILABLE FOR ADVANCE SHIPPING				
39NLAA*	NLIGHT AIR GEN 2 REMOTE POWER PACK			
39NLWA*	NLIGHT WIRED REMOTE POWER PACK			
3981GC	DRIVER BOX FOR REMOTE INSTALLATION - 4" X 12" X 16"			
ACCESSORY EMERGENCY BATTERY	ACCESSOIRE BATTERIE D'URGENCE			
3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY			

RIVER 4803/3803

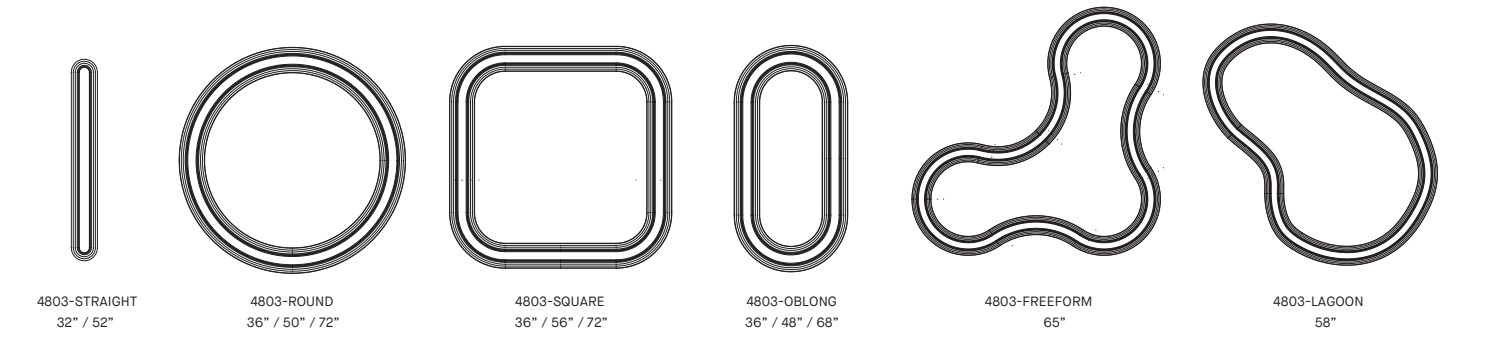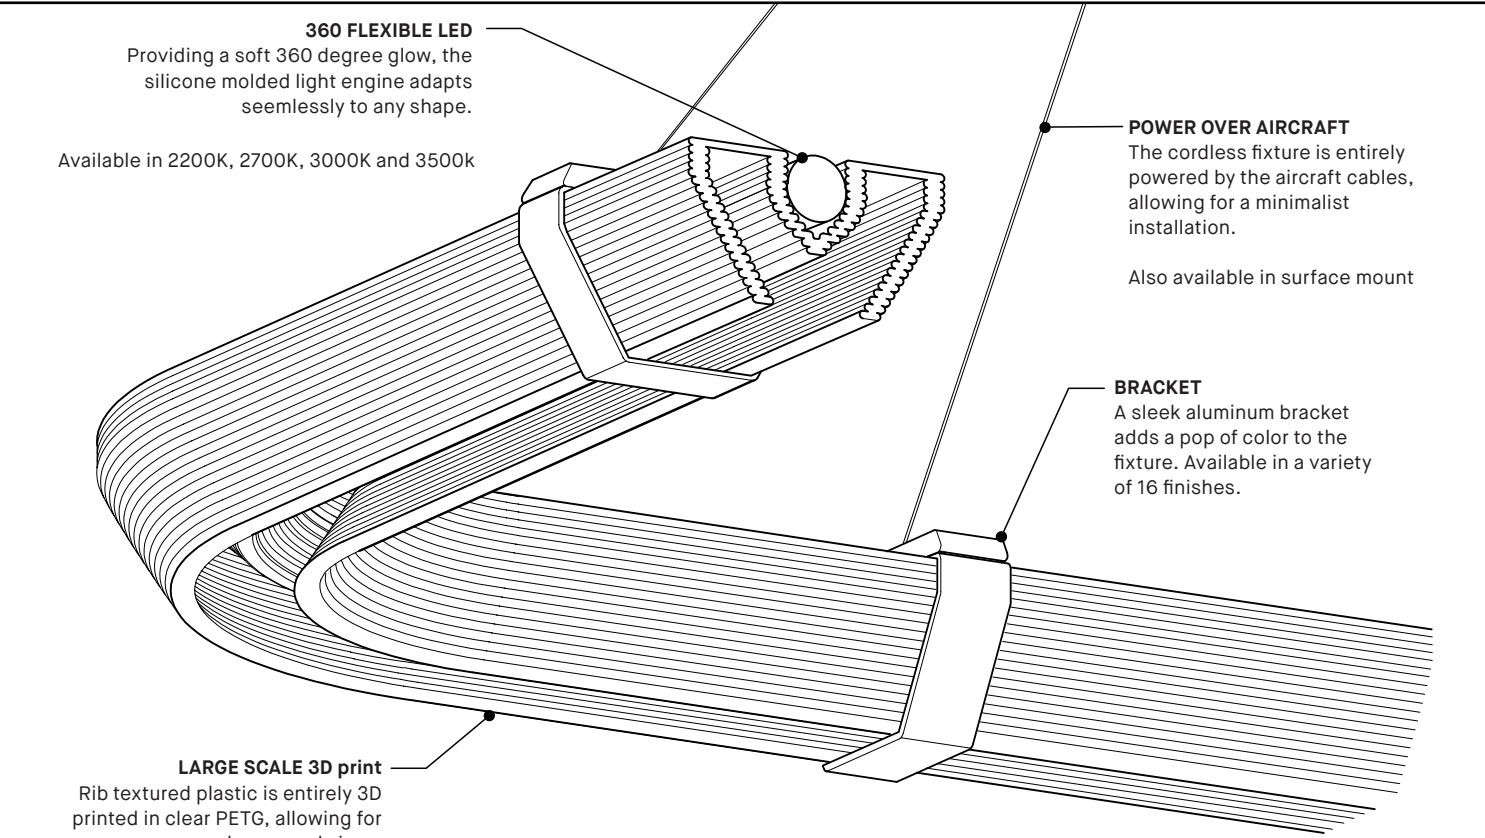

PRODUCT SPECIFICATION	4803-STRAIGHT 32" / 52"	4803-ROUND 36" / 50" / 72"	4803-SQUARE 36" / 56" / 72"	4803-OBLONG 36" / 50" / 72"	4803-SQUARE 38" / 56" / 72"	4803-FREEFORM 65"	4803-LAGOON 58"
PERFORMANCE	REG	REG	REG	REG	REG	REG	REG
SYSTEM WATTAGE	16.3W / 28.1W	59.8W / 84.2W / 126.3W	42.2W / 59.6W / 84.2W	73.7W / 112.2W / 168.7W	112.2W	73.7W	5760 LM
DELIVERED LUMENS (4000K)	715 LM / 1546 LM	3060 LM / 4325 LM / 6494 LM	2165 LM / 3062 LM / 4329 LM	3783 LM / 5760 LM / 8665 LM	7575 LM	54.8 LM/W	54.8 LM/W
EFFICACY	54.8 LM/W	54.8 LM/W	54.8 LM/W	54.8 LM/W	54.8 LM/W	54.8 LM/W	54.8 LM/W
OTHER INFORMATION							
LUMINAIRE'S WEIGHT	4.3LBS / 7.8LBS	15.5LBS / 21.9LBS / 32.9LBS	10.9LBS / 15.5LBS / 22.0LBS	19.2LBS / 29.1LBS / 40.8LBS	29.2LBS	19.4LBS	
	1.9KG / 3.5KG	7.0KG / 10.0KG / 15.0KG	5.0KG / 7.1KG / 10.0KG	8.7KG / 13.2KG / 18.5KG	13.3KG	8.8KG	
L70 (LUMEN MAINTENANCE)	60,000	60,000	60,000	60,000	60,000	60,000	60,000

EFFICACY MULTIPLIERS		
CRI	CCT	FACTOR
90+	4000K	1.00
90+	3500K	0.98
90+	3000K	0.94
90+	2700K	0.91

LIGHT DISTRIBUTION

404X-BEL



Visit our website for warranty terms and conditions.